





# Vent-Bettina



shown in Brushed Nickel  
with wood blades

	Safety cages available for low ceilings.
	Suitable for Damp Location
	Compatible with Downrod Light Canopy
	U.S.A. Components and Labor



shown in Polished Chrome with  
metal blades and safety cage

The Vent-Bettina rotational ceiling fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation. The motor heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both motor head position and fan blade speed. The Bettina is available in polished chrome, brushed nickel, polished copper, bronze or black. White, brushed copper, polished brass, brushed brass, black nickel and bronzette are available as special orders. Bronzette, incidentally, is our monochromatic powder-coated bronze finish.

- Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans.
- Constructed of cast aluminum, heavy spun and stamped steel, the Bettina carries a limited lifetime warranty.
- Each unique motor mount and fan head knob is made of genuine marbled Bakelite.
- The Bettina is available with the following blade options:
  - metal blades with decorative metal blade guards
  - solid, ecologically harvested mahogany blades without blade guards
  - metal blades with metal safety cages for use in low ceiling applications (7 ft in US / 8.2 ft in Canada)

## Standard Finishes

bronze	brushed nickel	black
	polished chrome	polished copper

## Special Order Finishes

polished brass	black nickel	brushed brass
brushed copper	white	bronzette

# MATTHEWS

FAN COMPANY


www.matthewsfanco.com



## Vent-Bettina

weight: 19 lbs  
voltage: 110\*

10", 20", 30", 48" or 72"  
downrods available

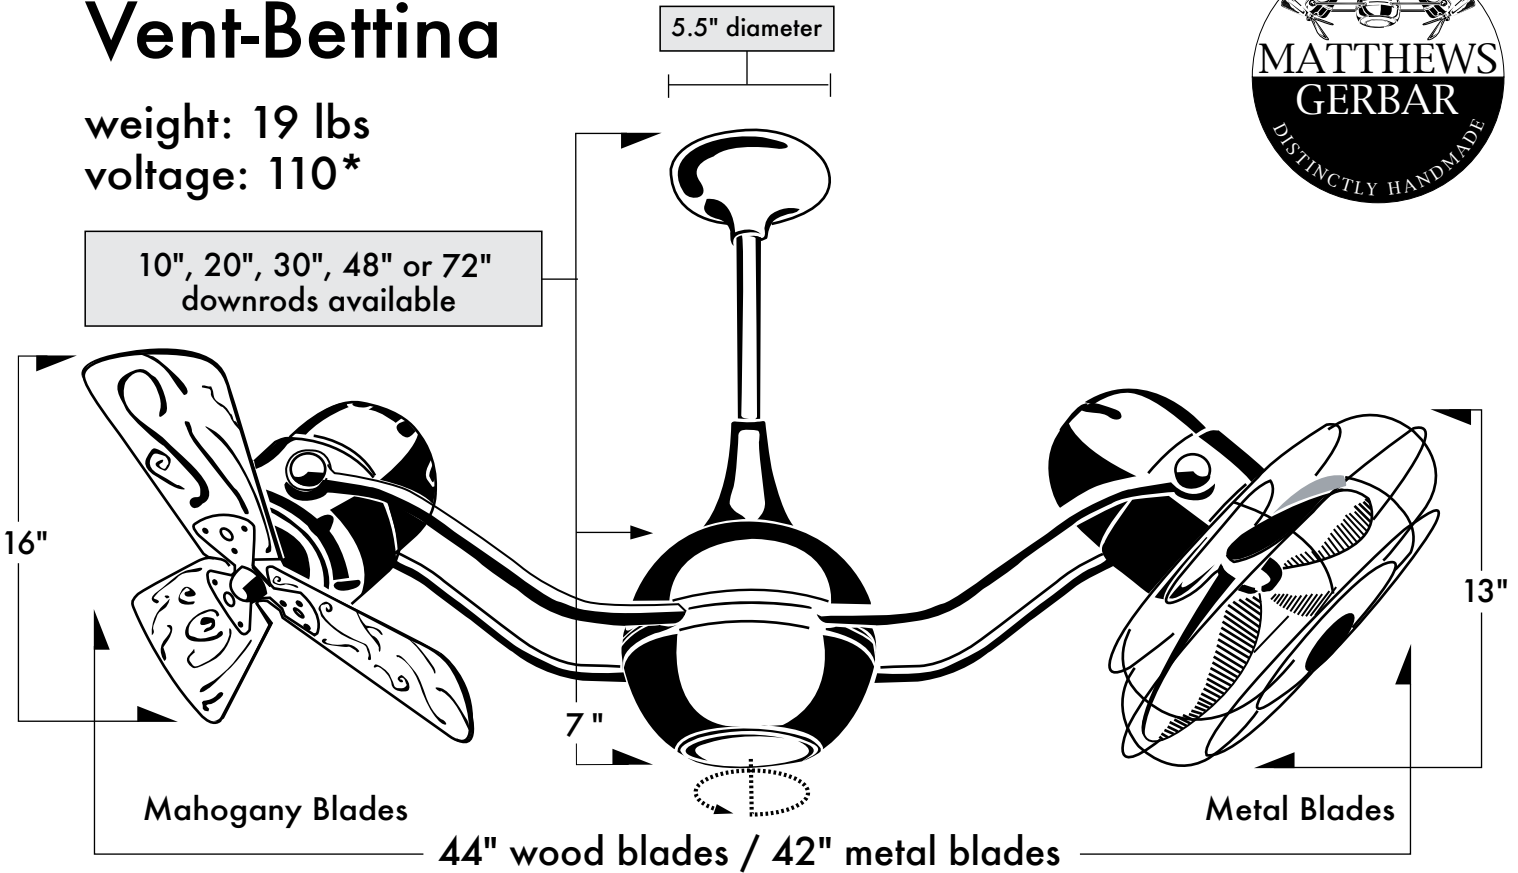

Increasing Angles of Fan Heads to Support Poles Increases Speed of Axial Rotation  
Optimum Fan Head Position is 60°

The Vent-Bettina can be mounted with any one of the following downrod lengths: 10, 20, 30, 48 or 72".

- The downrods can be easily field cut; they are not threaded.

The Vent-Bettina is compatible with flat or vaulted ceiling canopies.

All fans best regulated by variable speed wall controls.

Metal bladed fans with protective powder or clear coatings are suitable for Damp Location.

Safety cages available for low ceiling applications.

\*Please contact us for possible 220V conversions.

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140



Damp Location